


BUCKEYE LUBRICANTS 212B-164-80 HEAVY DUTY FORMING COMPOUND

Buckeye Lubricants 212B-164-80 was developed to handle a wide range of metal forming applications including drawing, stamping, forming, upsetting, cold heading and extruding.

Buckeye Lubricants 212B-164-80 provides excellent die life and part finish and it minimizes pick up on dies, punches, etc. It contains no oil and provides superior lubricity properties and is suitable for deep draw applications.

Buckeye Lubricants 212B-164-80 can be used “as is” or diluted with either water or oil. It can be used on most metals and can be applied by brush, swab, roller, spray or dip techniques. Solvent or alkaline cleaners can be used to remove **Buckeye Lubricants 212B-164-80**.

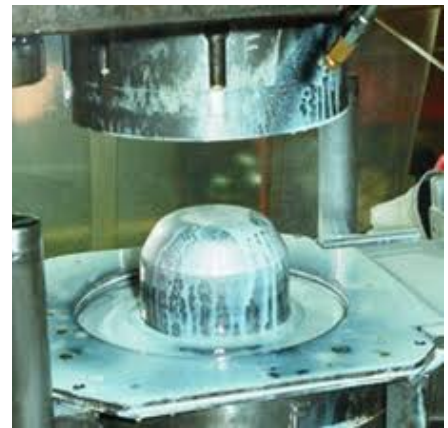

SAMPLES PROVIDED ON REQUEST

Buckeye Lubricants 212B-164-80 is a SUPERIOR Heavy Duty Metal Forming Compound that is Suitable for ALL Applications !!



**Buckeye
Lubricants**

20801 Salisbury Rd.
Bedford, Ohio 44146
Phone: (216) 581-3600
FAX: (216) 581-2734

Email: sales@buckeyelubricants.com
Web: www.buckeyelubricants.com